



DECOVERY™

NeoCryl® XK-30

Next generation resins for decorative paints

With DECOVERY™, we've explored new ways to meet tighter environmental standards. Not just for complying with legislation on Volatile Organic Compound (VOC) content, but beyond. As a pioneer in low VOC water borne solutions, we invite you to discover our high performance acrylic emulsion, the NeoCryl® XK-30, especially selected as a DECOVERY™ solution for primers and functional primers. The NeoCryl® XK-30 is delivered at 42,5% solid content.

Beyond performance...

One of the key parameters of a functional primer is stain locking. It is hard to have good stain locking water-based primers because trees, when alive, transport water. The advantage of NeoCryl® XK-30, an acid soluble polymer is its pH value, which allows a much better wetting of the wood. NeoCryl® XK-30 gives stain locking, with excellent adhesion to the substrate. Another key differentiator for the NeoCryl® XK-30 is its uniform thickness. The short drying time and good sanding of the NeoCryl® XK-30 allow painters to apply more layers in one day.

2010 is not the final goal

The DECOVERY™ product range focuses on bringing a long-term sustainable advantage to our customers. The VOC level and performance improvements achieved will not stop here; we will continue to innovate with future market needs in mind, going beyond legislative requirements.

Don't let technology limit your true potential

Our aim is to develop market driven solutions based on performance, not just technology. The NeoCryl® XK-30 is a DECOVERY™ solution that differentiates with high performance properties including stain locking, adhesion to the substrate, and drying time.

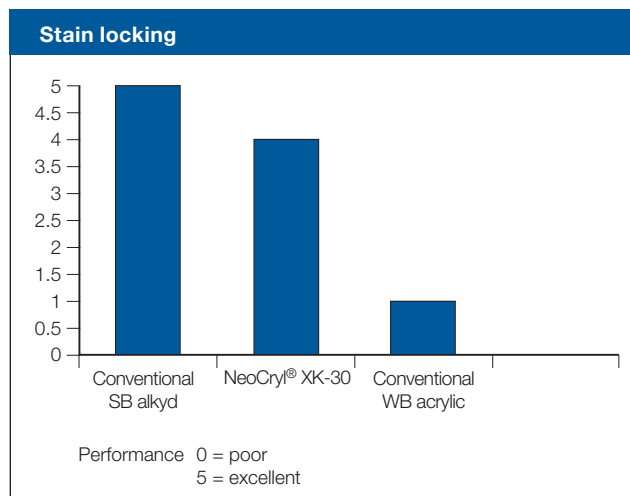


Figure 1

Discover what's beyond...and start formulating: just download the product documentation from www.dsmneoresins.com

Head office: DSM NeoResins*

Sluisweg 12, PO Box 123, 5140 AC Waalwijk, The Netherlands
Tel. +31 (0)416 689 911, Fax +31 (0)416 689 922

DISCLAIMER: The information and recommendations in this publication are to the best of our knowledge, information and belief accurate at the date of publication. Nothing herein is to be construed as a warranty, express or otherwise. In all cases, it is the responsibility of the users to determine the applicability of such information or suitability

of any products for their own purpose. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such is free of patent infringement and are not recommendations to infringe on any patent. All sales of these products shall be subject to DSM's standard conditions of sales.

Haloflex, NeoCryl, NeoPac, NeoRad, NeoRez, Uracron, Urad, Uradil, Uradur, Uraflex, Uralac, Uramex, Uranox and Urathix are registered trademarks.
©2008 DSM NeoResins B.V. – Printed in the Netherlands.